




LOUIS ADHESIVE TAPES CO., LTD.

1070 Soi Suanplu, South Sathorn Rd., Bangkok 10120 Thailand

Tel : (662) 2872100 (12 Lines), 2864223-6, 2874326-8

Fax : (662) 2871101 (direct), 2874736

E-mail : export@louistapes.com URL : www.louistapes.com

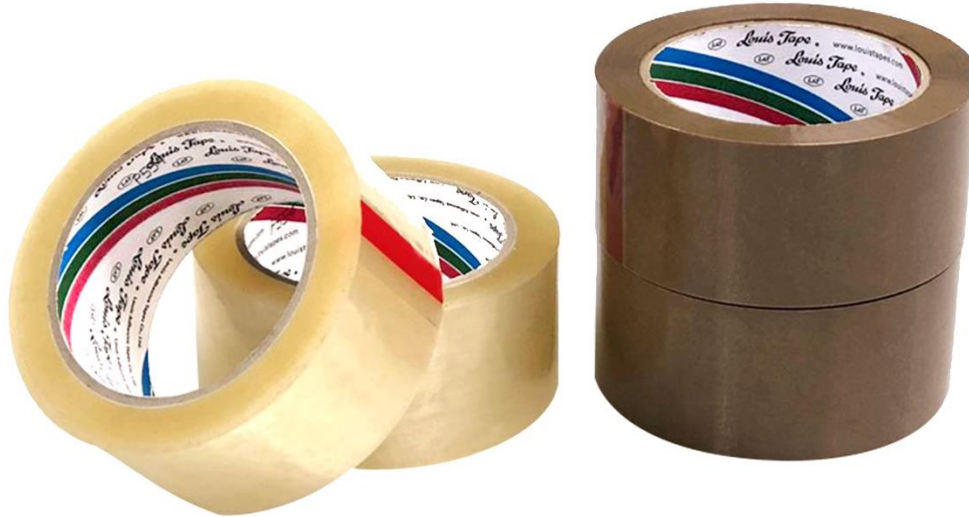

OPP Synthetic Rubber Tape (Hotmelt) No. P565, P554

- Produced from Oriented Polypropylene film coated with synthetic rubber adhesive, high tensile strength and aggressive adhesion property.

Features

- Produced from Strong Oriented Polypropylene film coated with synthetic rubber adhesive
- High tensile strength and an aggressive adhesion property
- Low release force. Easy to dispense from the roll.
- Available in clear, brown and tan color.

Applications

- Sealing boxes and other packaging applications
- Excellent for a big roll packing tape for machinery

Code No.	Adhesive Type	Thickness	Length	Core Size
P565	synthetic Rubber Solvent	48 μ \pm 2 μ	100Y,1000Y	3 inches
P554		40 μ \pm 2 μ		

*Custom sizes available upon request